

P25 Compact Series – Stainless Steel Protocol Trackerball

DESCRIPTION

The P25 Compact Series are rugged professional Trackerballs. The device incorporates the same proven technology found in the well-established P38 range, providing the user with the same high specification Trackerball in a smaller package.

The ball and trim are made from high quality stainless steel and provide extra protection in public access points where vandal attacks are commonplace. High-grade stainless steel shafts and bearings ensure a solid and precise pointer control while the patented floating seal technology limits ingress of aqueous solutions and particulates. The unit has been designed to be back of panel mounted as part of OEM keyboards and consoles. The P25 is ideal for applications where space is at a premium.



FEATURES AND APPLICATIONS

- Sealing to IP65 (NEMA 6)
- Outputs: PS/2, USB
- Smooth operation in rugged environments
- Stainless steel shaft and bearings
- Custom connector options
- Optional anti-vandal kit
- For use in medical, kiosk and industrial applications
- OEM custom solutions available

SPECIFICATIONS

Mechanical

Weight	90 grams
Ball	AISI 440 stainless steel, Ø25 mm
Top flange material	AISI 316 stainless steel
Tracking force	50 grams nominal continuous – sealed (IP65)
Housing material	ABS in black
Mounting position	Horizontal to 60° (IP65 sealed)
Sealing material	PTFE composite IP65 rated (qualified @ 25°C static)

Electrical

Protocol	PS/2, USB auto-select
Supply voltage	5V D.C. \pm 5%
Supply current	15mA typical
Resolution	158 pulses per ball revolution (633 counts per ball revolution)
Output connector	6 Way JST, right-angled header, part no. S6B-PH-SM3-TB
Mating output connector	6 Way JST connector, part no. PH, CR or KR types
Switch Inputs	3 switches: left, middle, and right. Connection through 4-way JST, right-angled header, part no: S4B-PH-SM3-TB.
Mating switch connector	4 Way JST connector, part no: PH, CR or KR types

Environmental

Operating temperature	0°C to +65°C
Storage temperature	-40°C to + 85 °C
Humidity	30% min, 95% max, non-condensing
Vibration	6-500Hz at 49m/s ² in all 3 axes
Shock	100g vertical axis, 40g horizontal axis
Lifetime	10 million ball revolutions (non sealed) >2 million ball revolutions – (sealed)
Impact	10 Joules (with anti-vandal Kit)
ESD	12kV air-discharge and 6kV contact discharge.

CONNECTION DETAILS

Connection is made to the P25 Trackerball by means of latching JST connectors (or equivalent). Tables 1 to 3 highlight the connection details. Custom connections are available (please contact your local sales office for further details).

Output connector:

Pin Number	USB, PS/2 (Auto select)
1	Earth
2	-
3	+5V D.C.
4	PS/2 Data, D-
5	PS/2 Clock, D+
6	0V

Table 1 Output connections

Description: 6 way, 2mm pitch, right-angled connector
 Manufacturer: JST (or equivalent)
 Part No: S6B-PH-SM3-TB
 Mating connector: PH, CR or KR types


Switch input connector:

Pin Number	Function
1	Left switch
2	Middle switch
3	Right switch
4	0V

Table 2 Switch connections

Description: 4 way, 2mm pitch, right-angled connector
 Manufacturer: JST (or equivalent)
 Part No: S4B-PH-SM3-TB
 Mating connector: PH, CR or KR types

Switch schematic

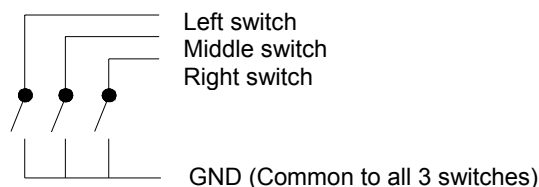

Backlight connector (optional):

Pin Number	Function
1	+5V D.C.
2	0V

Table 3 Backlight connections

Description: 2 way, 2mm pitch, right-angled connector
 Manufacturer: JST (or equivalent)
 Part No: S2B-PH-SM3-TB
 Mating connector: PH, CR or KR types

OPTIONAL CABLE ASSEMBLIES

Standard cable assemblies are available for connection to the P25 Trackerball (see table 4). Alternative cable assemblies can also be supplied to customer specifications (please contact your local sales office for further details).

Cable Type	Cable Part No.	Description
USB Output cable	T9902209	Output cable, 2 metres, USB 'A' plug to 6 way JST
PS/2 Output cable	T9902210	Output cable, 2 metres, PS/2 Male to 6 way JST
Switch cable	T9902125	Switch cable, 4 way JST to bare wires, 500mm long
Backlight cable	T9902211	Backlight cable, 2 way JST to bare wires, 500mm long
Adapter	A3900126	USB to PS/2 converter

Table 4 Cable assemblies

TRACKERBALL CONFIGURATION

The USB and PS/2 protocols provide features within the Trackerball software that can be selected using the DIP switch located on the printed circuit board. Table 5 details the assigned function of each switch.

USB/PS2 DIP switch functions

Switch	Function	OFF	ON
1	Orientation 1 Setting	See Figure.1	See Figure.1
2	Orientation 2 Setting	See Figure.1	See Figure.1
3	VX3 - Virtual 3 Axis Function	Feature Enabled	Feature Disabled
4	Smart Button – Button Lock	Feature Available	Feature Not Available


Factory default setting: DIP switches 1 and 2 OFF, All other switches ON

Table 5 DIP switch functions

Orientation

The orientation function allows the user to mount the P25 device in one of four positions (see fig.1 below). The orientation of the device is determined by the direction in which the output connector is facing (when viewed from the top of Trackerball device).

The Trackerball orientation can be selected to accommodate customer requirements for connector location and wiring.

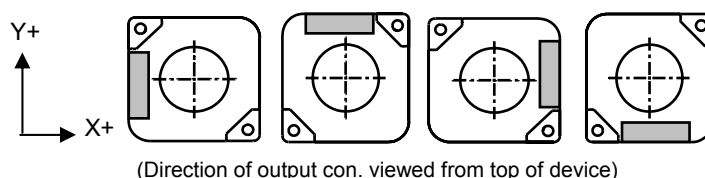

Switch 1 (Orientation 1)	ON	ON	OFF	OFF
Switch 2 (Orientation 2)	ON	OFF	ON	OFF

Figure.1 Orientation settings

Smart switch

A patent protected button latch facility.

Operation:

Press right button for 3 seconds or more to enable;

Once enabled, pressing any button for approximately 1 second latches that button on;

Press any button momentarily to de-latch;

Disabled with a further press of the right button for 3 seconds or more;

VX3

VX3 is patent protected facility that provides the same 2 modes of functionality as a scroll wheel on a 3-axis mouse.

Operation:


Press middle button once to latch scroll mode one (e.g. dynamic pan feature);

Press middle button again to latch scroll mode two (e.g. 3rd axis zoom feature);

Further middle button presses toggles between scroll mode one and scroll mode two;

Press either left or right buttons to cancel feature and resume normal X-Y operation

DIMENSION DRAWING

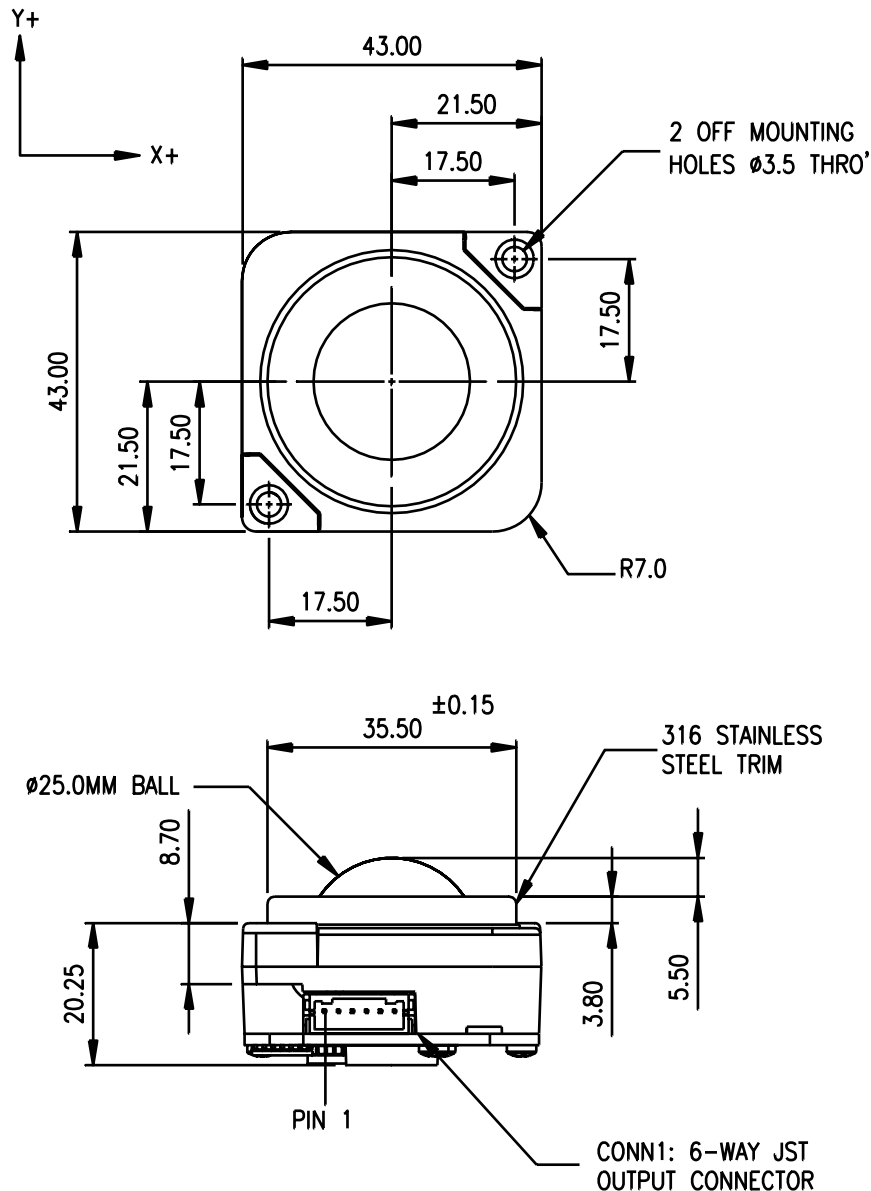

Dimensional drawing specifies factory default orientation.

All dimensions are in mm unless otherwise stated.

Tolerances ± 0.2 mm unless otherwise stated

Please note that an IGES model is available on request. Please contact your local sales office for more information.

OPTIONAL ANTI-VANDAL KIT

This optional back plate enables the unit to absorb a very high level of abuse/impact. When mounted correctly by the end-user, the back plate will limit any hostile impacts subjected to the device during operation in public access points. The back plate provides protection for shafts, bearings and other components within the unit and ensures continual functionality under demanding conditions. Typical applications include public information kiosks and consoles. The kit includes all necessary fasteners (see datasheet DS25301 for mounting details).

(Please contact sales for further details/specifications).

Product ordering code **P25-XXXXXX**. Please construct your standard product ordering code by selecting the numbers and letters to suit your specification:

P	25	-	X	6	0	2	C	C
Product range P = Panel			Ball size (Nominal mm)					
Sealing capabilities 1 = No Seal – IP40/NEMA 1 4 = PTFE seal – IP54/NEMA 5 5 = PTFE seal - IP65/NEMA 6 9 = Custom QN								
Electrical output 6 = USB/PS2 Auto select								
Integrated switches 0 = No Switches								
Mounting option 2 = Mount to back of panel								
Top plate, Body style C = Sealed, black, Stainless trim								
Ball colour C = AISI 440 stainless steel								

*Non standard colour – MOQ and lead-time may apply

Ordering Example:

P25-5602CC: Panel 25mm, sealed IP65, USB/PS/2 output, no switches, mount to back of panel, steel trim, steel ball.

OPTIONAL EXTRAS

- Anti-vandal option (See datasheet DS25301)
- Optional external switches (See datasheet DS25201)
- Customer specific colour matching (MOQ applies)
- Cable assemblies (See datasheet DS25201)

Contact your local distributor for further details on product variants and custom specifications.